


## Lift Gate Conveyor (Model:PTE-350)

**一、 Features**

1	650mm wide channel or user-specified multiple protection detection, safe and reliable
2	Cylinder lifting and lowering additional auxiliary positioning control, flexible and stable lifting
3	PLC control system, universal SMAME communication mode

**二、 Specifications & Technical Parameters**

1	Description	For production lines where there is a demand for channels
2	Cycle time	About 10 seconds
3	Transmission speed	0.5-20 m/min or user specified
4	Transmission height	900±20mm
5	Transmission direction	L→R or R→L
6	Circuit board effective size	80(L)*50(W)-400(L)*350(W)mm
7	Dimension(L*W*H)	L750 unfolds 1200*W690*H1050mm
8	Power supply and electric load	220V AC, single phase Max 300 VA
9	Board thickness	Minimum 0.6 mm
10	Weight(Kg)	120Kg

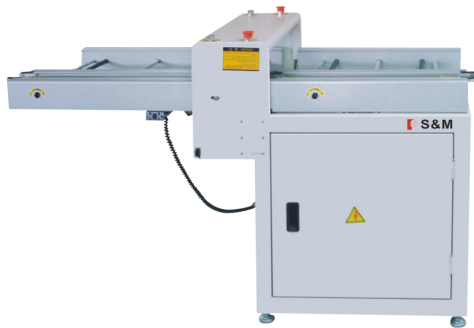

*Note: The picture is for reference only, and the specific specifications and models are subject to the text content.*